


2010

boardman
 performance/design/quality

/MTB

Specification & Geometry

	Sport HT	Comp HT	Team HT
Frame	Double butted aluminium	Fully double butted aluminium	Ultralight super butted race spec aluminium
Rear Shock	—	—	—
Fork	RockShox Dart 3, 100mm travel, adjustable rebound damping & lockout	RockShox Recon SL Air, 100mm travel, adjustable rebound damping & lockout	RockShox Reba SL, 100mm travel, Motion Control damping & lockout
Headset	Semi integrated cartridge bearing	Semi integrated cartridge bearing	FSA Orbit integrated cartridge bearing
Spacers	Full carbon 4x5mm, 1x10mm	Full carbon 4x5mm, 1x10mm	Full carbon 4x5mm, 1x10mm
Stem	Ritchey OS 31.8mm	Ritchey OS 31.8mm	Ritchey Comp OS 31.8mm
Handlebars	Ritchey OS 31.8mm	Ritchey OS 31.8mm	Ritchey Comp Rizer OS 31.8mm
Seatpost	Ritchey 27.2mm	Ritchey 27.2mm	Ritchey Comp 27.2mm
Saddle	cboardman, Cro-Mo rails	cboardman, Cro-Mo rails	cboardman, Cro-Mo rails
Brakes	Tektro Auriga Comp hydraulic disc brakes, 160mm rotors	Avid Juicy 3 hydraulic disc brakes, 160mm rotors	Avid Elixir R hydraulic disc brakes, 160mm rotors
Shifters	SRAM X5 9 speed	SRAM X5 9 speed	SRAM X7 9 speed
Rear Mech	SRAM X5	SRAM X7	SRAM X9
Front Mech	SRAM X5	SRAM X5	SRAM X7
Cassette	SRAM PG950 11-32T	SRAM PG950 11-32T	SRAM PG950 11-32T
Chain	Shimano HG-73	Shimano HG-73	Shimano HG-73
Chainset	Truvativ 5D 44/32/22T	Truvativ Firex 3.1 GXP 44/32/22T	Truvativ Firex 3.2 GXP 44/32/22T
Bottom Bracket	Truvativ PowerSpline	Truvativ GXP	Truvativ GXP
Rims	Ritchey Pro Disc 32H	Ritchey Pro Disc 32H	Ritchey Pro Disc 32H
Hubs	Sealed bearings	Sealed bearings	Sealed bearings
Spokes	Stainless steel double butted black	Stainless steel double butted black	Stainless steel double butted black
Tyres	Maxxis Dy-no-mite 2.1"	Continental Speed King 2.1"	Continental Speed King 2.1"
Pedals	Alloy platform	Alloy platform	Alloy platform
Weight*	28 lbs	25.8 lbs	24.8 lbs

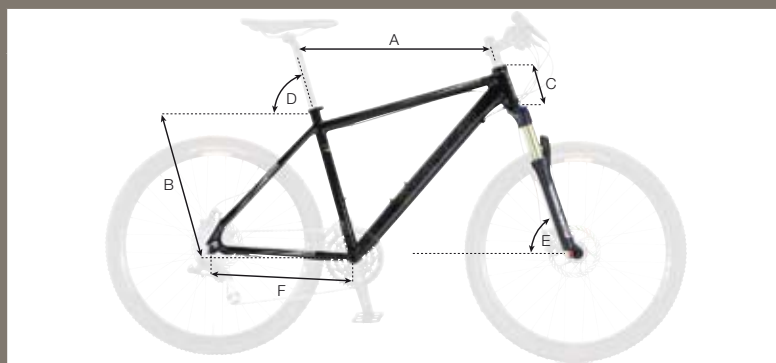

Measurement Key

- A – Top Tube (effective)
- B – Seat Tube (centre to top)
- C – Head Tube
- D – Seat Angle
- E – Head Angle
- F – Chainstay

Pro HT	Comp FS	Team FS	Pro FS
Ultralight super butted race spec aluminium	Lightweight 4 bar linkage full suspension frame with 120mm travel and butted tubing	Lightweight 4 bar linkage full suspension frame with 120mm travel and butted tubing	Superlight 4 bar linkage full suspension frame with 120mm travel and super butted tubing
—	RockShox Ario 2.1 Air shock with adjustable rebound damping	RockShox Monarch 3.1 Air shock with adjustable rebound & compression damping	RockShox Monarch 3.3 Air shock with adjustable rebound, compression damping & lockout
RockShox Reba Race, 100mm travel, Motion Control damping, external floodgate & lockout	RockShox Recon 335 Air, 120mm travel, adjustable rebound damping & lockout	RockShox Reba SL, 120mm travel, Motion Control damping, lockout & 20mm Maxle Lite	RockShox Reba Race, 120mm travel, Motion Control & compression damping, external floodgate, lockout & 20mm Maxle Lite
FSA Orbit integrated cartridge bearing	Semi integrated cartridge bearing	FSA Orbit integrated cartridge bearing	FSA Orbit integrated cartridge bearing
Full carbon 4x5mm, 1x10mm	Full carbon 4x5mm, 1x10mm	Full carbon 4x5mm, 1x10mm	Full carbon 4x5mm, 1x10mm
Ritchey Pro OS 31.8mm	Ritchey OS 31.8mm	Ritchey Comp OS 31.8mm	Ritchey Pro OS 31.8mm
Ritchey Pro Rizer OS 31.8mm	Ritchey Rizer OS 31.8mm	Ritchey Comp Rizer OS 31.8mm	Ritchey Pro Rizer OS 31.8mm
Ritchey Pro 27.2mm	Ritchey 31.6mm	Ritchey 31.6mm	Ritchey Pro 31.6mm
cboardman, Cro-Mo rails	cboardman, Cro-Mo rails	cboardman, Cro-Mo rails	cboardman, Cro-Mo rails
Avid Elixir R carbon hydraulic disc brakes, 160mm rotors	Avid Juicy 3 hydraulic disc brakes, 160mm rotors	Avid Elixir R hydraulic disc brakes, 160mm rotors	Avid Elixir R carbon hydraulic disc brakes, 160mm rotors
SRAM X9 9 speed	SRAM X5 9 speed	SRAM X7 9 speed	SRAM X9 9 speed
SRAM X0	SRAM X7	SRAM X9	SRAM X0
SRAM X9	SRAM X5	SRAM X7	SRAM X9
SRAM PG950 11-32T	SRAM PG950 11-32T	SRAM PG950 11-32T	SRAM PG950 11-32T
Shimano HG-73	Shimano HG-73	Shimano HG-73	Shimano HG-73
Truvativ Stylo GXP 44/32/22T	Truvativ Firex 3.1 GXP 44/32/22T	Truvativ Firex 3.2 GXP 44/32/22T	Truvativ Stylo GXP 44/32/22T
Truvativ GXP	Truvativ GXP	Truvativ GXP	Truvativ GXP
Ritchey WCS Disc 32H	Ritchey Pro Disc 32H	Ritchey Pro Disc 32H	Ritchey WCS Disc 32H
Cartridge bearings	Sealed bearings	Sealed bearings, 20mm front axle	Sealed bearings, 20mm front axle
Stainless steel double butted black	Stainless steel double butted black	Stainless steel double butted black	Stainless steel double butted black
Continental Speed King 2.1"	Continental Speed King 2.1"	Continental Speed King 2.1"	Continental Speed King 2.1"
Alloy platform	Alloy platform	Alloy platform	Alloy platform
24.1 lbs	29.1 lbs	28.3 lbs	27.4 lbs

Model	Size	A – Top tube effective (cm)	B – Seat tube (cm)	C – Head tube (cm)	D – Seat angle (deg)	E – Head angle (deg)	F – Chainstay (cm)
MTB/HT	S	56.5	40.6	10	73	70	42.4
	M	59	45.7	11.5	73	70	42.4
	L	61.5	50.8	13	73	70	42.4
MTB/FS	S	56.5	41	12	73	69	42.5
	M	59	45.7	12	73	69	42.5
	L	61.5	50.8	13	73	69	42.5